


CMPS09 - Tilt Compensated Compass Module

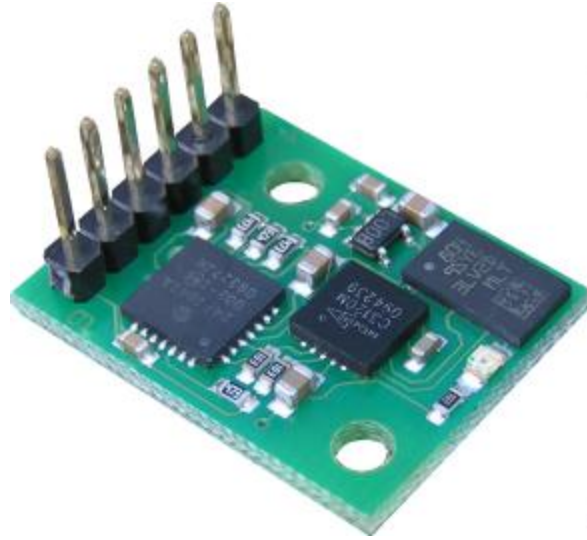


Introduction

The CMPS09 module is a tilt compensated compass. Employing a 3-axis magnetometer and a 3-axis accelerometer and a powerful 16-bit processor, the CMPS09 has been designed to remove the errors caused by tilting of the PCB. The CMPS09 produces a result of 0-3599 representing 0-359.9 or 0 to 255. The output of the three sensors measuring x, y and z components of the magnetic field, together with the pitch and roll are used to calculate the bearing, each of these components are also made available in there raw form. We have also written [examples](#) of using the CMPS09 module with a wide range of popular controllers. The CMPS09 module requires a power supply at 3.3 - 5v and draws a nominal 25mA of current. There are three ways of getting the bearing from the module. A serial interface, an I2C interface or a PWM output.


Mode selection

For data on each mode please click the mode heading. Note the CMPS09 looks at the mode selection pins at power-up only.


[I2C mode](#)

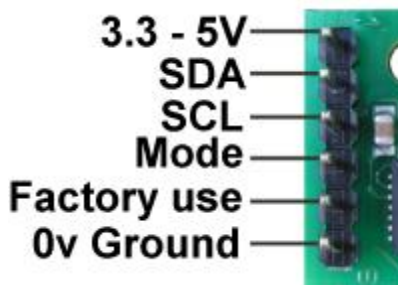

[Serial mode](#)

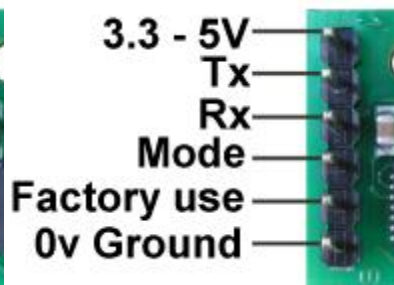

[PWM mode](#)

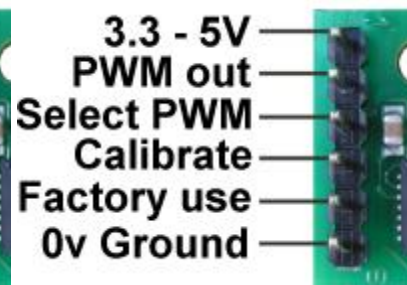


To enter the I2C mode of operation leave the mode pin unconnected

To enter the serial mode of operation connect the mode pin to ground

To enter the PWM mode of operation connect the select PWM pin to ground

PCB Drilling Plan

The following diagram shows the CMPS09 PCB mounting hole positions.

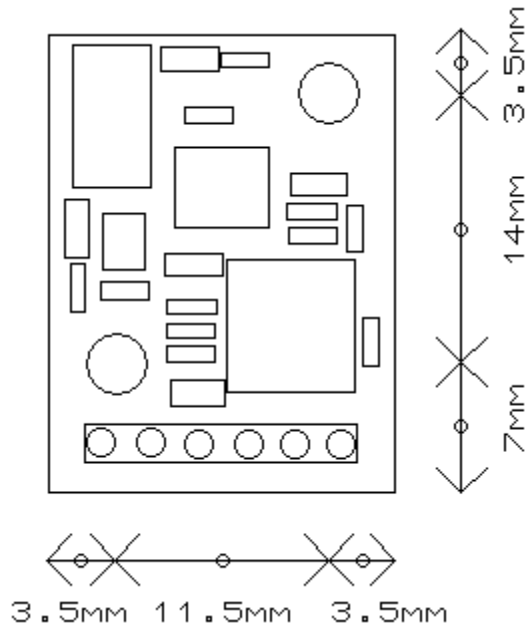

We have [examples](#) of using the Compass module with a wide range of popular controllers.