


# 1. Mifare Standard Support

- Mifare s50 1k memory
- Mifare S70 4k memory
- Mifare UltraLight
- Mifare Pro x
- Other ISO14443 A

# 2. Technical Specification


- Power supply: 2.5-3.3 V, 30-50mA
- Interface: SPI 、 IIC、 UART
- R/W distance of up to 50mm
- Storage temperature: -40 °C ~ +125 °C
- Operating temperature: -25°C ~ +80 °C

# 3.

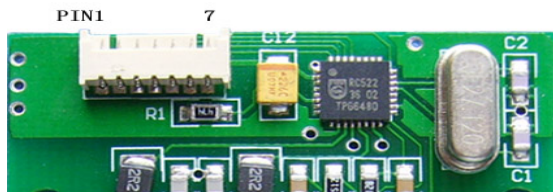

(FRONT OF CR022)

PIN1	GND	
PIN2	SDA	Pin24 of Rc522
PIN3	SCK	Pin29 of Rc522
PIN4	MISO	Pin30 of Rc522
PIN5	MISO	Pin31 of Rc522
PIN6	3V	
PIN7	Rst	Pin6 of Rc522

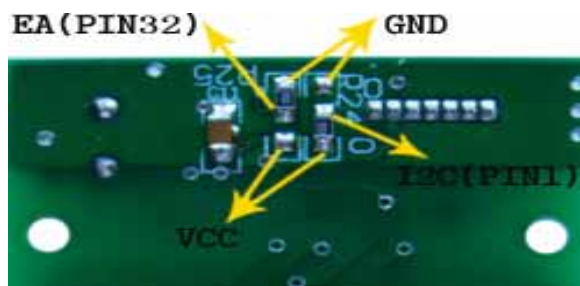

(BACK OF CR022)